Message-Passing Algorithms for Channel Estimation and Decoding Using Approximate Inference

Mihai-A. Badiu*†, Gunvor E. Kirkelund*, Carles Navarro Manchón*, Erwin Riegler‡ and Bernard H. Fleury*
* Aalborg University, Denmark
† Technical University of Cluj-Napoca, Romania
‡ Vienna University of Technology, Austria

arXiv:1202.1467v1 [cs.IT] 7 Feb 2012

***Abstract*—We design iterative receiver schemes for a generic wireless communication system by treating channel estimation and information decoding as an inference problem in graphical models. We introduce a recently proposed inference framework that combines belief propagation (BP) and the mean field (MF) approximation and includes these algorithms as special cases. We also show that the expectation propagation and expectation maximization algorithms can be embedded in the BP-MF framework with slight modifications. By applying the considered inference algorithms to our probabilistic model, we derive four different message-passing receiver schemes. Our numerical evaluation demonstrates that the receiver based on the BP-MF framework and its variant based on BP-EM yield the best compromise between performance, computational complexity and numerical stability among all candidate algorithms.**

I. Introduction

The design of advanced receiver algorithms is crucial to meet the stringent requirements of modern communication systems. In this context, variational techniques performing Bayesian inference on probabilistic models [1] have proven to be a very useful tool to design such algorithms.

Among the variational techniques, belief propagation (BP) [2], [3] has found the most widespread use in digital communications. Originally applied to the decoding of channel codes, BP has been shown to be especially efficient in discrete probabilistic models. An alternative to BP is the mean field (MF) approximation and its message-passing counterpart, usually referred to as variational message-passing [4]. MF inference has been successfully applied to continuous probabilistic models involving probability density functions (pdfs) belonging to an exponential family, in which BP suffers from numerical intractability. Other notable examples of inference techniques are expectation-maximization (EM) [5] and expectation propagation (EP) [6]. EM is a special case of MF, where the approximate pdfs – referred to as *beliefs* – are Dirac delta functions; EP can be seen as an approximation of BP where some beliefs are approximated by Gaussian pdfs. Some attempts have been made to find a unified framework encompassing all these techniques, as the α-divergence interpretation in [7] and the region-based free energy approximations in [8]. Following the latter approach, a novel message-passing inference technique combining BP and the MF approximation was recently proposed in [9].

In this contribution, we investigate the design of receivers performing iterative channel estimation and data decoding in a generic wireless system. We review the combined inference technique in [9], which provides some degree of freedom in the choice of the parts of the factor graph in which either BP or MF is applied. Furthermore, we show that this framework can be modified to naturally embed EP, EM and BP with Gaussian approximation of some messages. We apply the mentioned inference techniques to the underlying probabilistic model of the wireless system and obtain four different receiver algorithms. Our numerical assessment in a transmission scenario with a fast-varying channel shows that the receivers based on the combined BP-MF technique and its modified EM version are the most suitable among the investigated techniques, judging by the attained BER performance and the computational complexity.

Notation: we denote by $|\mathcal{I}|$ the cardinality of a finite set $\mathcal{I}$; the relative complement of $\{i\}$ in $\mathcal{I}$ is written as $\mathcal{I} \setminus i$; the set $\{i \in \mathbb{N} \mid 1 \leq i \leq n\}$ is denoted by $[1:n]$. Boldface lowercase and uppercase letters are used to represent vectors and matrices, respectively; superscripts $(\cdot)^{\mathrm{T}}$ and $(\cdot)^{\mathrm{H}}$ denote transposition and Hermitian transposition, respectively. The Hadamard product of two vectors is denoted by $\odot$. For a vector $\mathbf{x} = (x_i \mid i \in \mathcal{I})^{\mathrm{T}}$, we write $\mathbf{x}_{\bar{i}} = (x_j \mid j \in \mathcal{I} \setminus i)^{\mathrm{T}}$; for a matrix $\mathbf{A} \in \mathbb{C}^{m \times n}$, $[\mathbf{A}]_{i,j}$ denotes its (i,j)th entry, $[\mathbf{A}]_{\bar{i},\bar{j}}$ is the matrix $\mathbf{A}$ with the ith row and jth column deleted, $[\mathbf{A}]_{\bar{i},j}$ denotes the column vector $([\mathbf{A}]_{k,j} \mid k \in [1:m] \setminus i)^{\mathrm{T}}$, and $[\mathbf{A}]_{i,\bar{j}}$ is the row vector $([\mathbf{A}]_{i,k} \mid k \in [1:n] \setminus j)$. The pdf of a multivariate complex Gaussian distribution with mean $\boldsymbol{\mu}$ and covariance matrix $\boldsymbol{\Sigma}$ is denoted by $\mathrm{CN}(\cdot; \boldsymbol{\mu}, \boldsymbol{\Sigma})$. We write $f(x) \propto g(x)$ when $f(x) = cg(x)$ for some positive constant c. We denote by $\mathcal{G}[\cdot]$ the approximation of the pdf in the argument with a Gaussian pdf with the same mean and covariance matrix. The Dirac delta function is denoted by $\delta(\cdot)$.

II. Message-Passing Inference Algorithms

We begin by concisely describing the unified message-passing algorithm that combines the BP and MF approaches (refer to [9]). Then, we briefly show how other widespread inference algorithms can be obtained as particular instances or slight modifications of the unified framework.

Let $p(\mathbf{x})$ be an arbitrary pdf of a random vector $\mathbf{x} \triangleq (x_i \mid i \in \mathcal{I})^{\mathrm{T}}$ which factorizes as

$$p(\mathbf{x}) = \prod_{a \in \mathcal{A}} f_a(\mathbf{x}_a) = \prod_{a \in \mathcal{A}_{\mathrm{MF}}} f_a(\mathbf{x}_a) \prod_{c \in \mathcal{A}_{\mathrm{BP}}} f_c(\mathbf{x}_c) \qquad (1)$$

where $\mathbf{x}_a$ is the vector of all variables x_i that are arguments of the function f_a for all $a \in \mathcal{A}$. In the rightmost expression in (1) we have grouped the factors into two sets so that

$\mathcal{A}_{\text{MF}} \cap \mathcal{A}_{\text{BP}} = \emptyset$ and $A_{\text{MF}} \cup \mathcal{A}_{\text{BP}} = \mathcal{A}$. The factorization in (1) can be visualized in a factor graph [2]. We define $\mathcal{N}(a) \subseteq \mathcal{I}$ to be the set of indices of all variable nodes connected to f_a in the factor graph; similarly, $\mathcal{N}(i) \subseteq \mathcal{A}$ denotes the set of indices of all factor nodes connected to x_i. The parts of the graph that correspond to $\prod_{a\in\mathcal{A}_{\text{BP}}} f_a(\mathbf{x}_a)$ and to $\prod_{a\in\mathcal{A}_{\text{MF}}} f_a(\mathbf{x}_a)$ are referred to as "BP part" and "MF part", respectively. We denote the variable nodes in the BP part by $\mathcal{I}_{\text{BP}} \triangleq \bigcup_{a\in\mathcal{A}_{\text{BP}}} \mathcal{N}(a)$ and the ones in the MF part by $\mathcal{I}_{\text{MF}} \triangleq \bigcup_{a\in\mathcal{A}_{\text{MF}}} \mathcal{N}(a)$.

The combined BP-MF inference algorithm approximates the marginals $p(x_i) = \int p(\mathbf{x}) \mathrm{d}\mathbf{x}_{\bar{i}}$, $i \in \mathcal{I}$ by auxiliary pdfs $b_i(x_i)$ called *beliefs*. They are computed as [9]

$$b_i(x_i) = z_i \prod_{c\in\mathcal{A}_{\text{BP}}\cap\mathcal{N}(i)} m^{\text{BP}}_{c\to i}(x_i) \prod_{c\in\mathcal{A}_{\text{MF}}\cap\mathcal{N}(i)} m^{\text{MF}}_{c\to i}(x_i) \quad (2)$$

with

$$\begin{aligned}
m^{\text{BP}}_{a\to i}(x_i) &= z_a \int \prod_{j\in\mathcal{N}(a)\setminus i} \mathrm{d}x_j \, n_{j\to a}(x_j) \, f_a(\mathbf{x}_a), \\
&\quad \forall\ a \in \mathcal{A}_{\text{BP}}, i \in \mathcal{N}(a) \\
m^{\text{MF}}_{a\to i}(x_i) &= \exp\left(\int \prod_{j\in\mathcal{N}(a)\setminus i} \mathrm{d}x_j \, n_{j\to a}(x_j) \ln f_a(\mathbf{x}_a) \right), \\
&\quad \forall\ a \in \mathcal{A}_{\text{MF}}, i \in \mathcal{N}(a) \\
n_{i\to a}(x_i) &= z_i \prod_{c\in\mathcal{A}_{\text{BP}}\cap\mathcal{N}(i)\setminus a} m^{\text{BP}}_{c\to i}(x_i) \prod_{c\in\mathcal{A}_{\text{MF}}\cap\mathcal{N}(i)} m^{\text{MF}}_{c\to i}(x_i), \\
&\quad \forall\ i \in \mathcal{N}(a), a \in \mathcal{A}
\end{aligned} \quad (3)$$

where z_i and z_a are constants that ensure normalized beliefs.

Belief propagation is obtained as a particular case of BP-MF by setting $\mathcal{A}_{\text{MF}} = \emptyset$, since in this case the expressions in (3) reduce to the BP message computations. Similarly, *mean field* is an instance of BP-MF when $\mathcal{A}_{\text{BP}} = \emptyset$.

Expectation propagation is very similar to BP, the main difference being that it constrains the beliefs of some variables to be members of the exponential family. Such approximations can also be integrated in the BP-MF framework by modifying the messages

$$m^{\text{EP}}_{a\to i}(x_i) \propto \frac{1}{n_{i\to a}(x_i)} \mathcal{G}\left[n_{i\to a}(x_i) m^{\text{BP}}_{a\to i}(x_i) \right] \quad (4)$$

for all $i \in \mathcal{I}_{\text{EP}} \subseteq \mathcal{I}_{\text{BP}}$, $a \in \mathcal{N}(i) \cap \mathcal{A}_{\text{BP}}$, where we assumed Gaussian approximations.

The *expectation-maximization* algorithm was shown in [9] to be a special case of MF when the beliefs of some variables are constrained to be Dirac delta functions. Again, we include this approximation in the BP-MF framework. This leads to $n_{i\to a}(x_i) = \delta(x_i - \tilde{x}_i)$ for all $i \in \mathcal{I}_{\text{EM}} \subseteq \mathcal{I}_{\text{MF}}$ and $a \in \mathcal{A}_{\text{MF}}$ where $\tilde{x}_i$ maximizes the unconstrained belief (2). We refer to this modified algorithm as BP-EM.

III. Probabilistic System Model

In this section, we present the signal model of our inference problem and its graphical representation. These will establish the baseline for the derivation of message-passing receiver schemes.

We analyze a system consisting of one transmitter and one receiver. A message represented by a vector $\mathbf{u} = (u_k \mid k \in [1:K])^{\text{T}} \in \{0,1\}^K$ of information bits is conveyed by sending N data and M pilot channel symbols having the sets of indices $\mathcal{D} \subset [1:M+N]$ and $\mathcal{P} \subset [1:M+N]$, respectively, such that $\mathcal{D} \cup \mathcal{P} = [1:M+N]$ and $\mathcal{D} \cap \mathcal{P} = \emptyset$. Specifically, vector $\mathbf{u}$ is encoded and interleaved using a rate $R = K/(NL)$ channel code and a random interleaver into the vector $\mathbf{c} = \left(\mathbf{c}_n^{\text{T}} \mid \mathbf{c}_n \in \{0,1\}^L, n \in [1:N]\right)^{\text{T}}$ with length NL. For each $n \in [1:N]$, the subvector $\mathbf{c}_n = (c_n^{(1)}, \ldots, c_n^{(L)})^{\text{T}}$ with length L is mapped to a data symbol $x_{i_n} \in \mathcal{S}_{\text{D}}$ with $i_n \in \mathcal{D}$, where $\mathcal{S}_{\text{D}}$ is a discrete modulation alphabet of size 2^L. The data symbols $\mathbf{x}_{\text{D}} = (x_i \mid i \in \mathcal{D})^{\text{T}}$ are multiplexed with pilot symbols $\mathbf{x}_{\text{P}} = (x_j \mid j \in \mathcal{P})^{\text{T}}$, which are randomly selected from the discrete modulation alphabet $\mathcal{S}_{\text{P}}$. Finally, the aggregate vector of channel symbols $\mathbf{x} = (x_i \mid i \in \mathcal{D} \cup \mathcal{P})^{\text{T}}$ is sent through a channel with the following input-output relationship:

$$\mathbf{y} = \mathbf{h} \odot \mathbf{x} + \mathbf{z}. \quad (5)$$

The vector $\mathbf{y} = (y_i \mid i \in [1:M+N])^{\text{T}}$ contains the observed signal samples at the receiver, $\mathbf{h} = (h_i \mid i \in [1:M+N])^{\text{T}}$ is the vector of channel coefficients, and $\mathbf{z} = (z_i \mid i \in [1:M+N])^{\text{T}}$ contains the samples of additive noise with pdf $p(\mathbf{z}) = \text{CN}\left(\mathbf{z}; \mathbf{0}, \gamma^{-1}\mathbf{I}_{M+N}\right)$ for some positive component precision γ. Note that (5) is able to model any channel with a multiplicative effect that is not affected by inter-symbol interference, e.g., a time-varying frequency-flat channel or the equivalent channel in the frequency domain in a multicarrier system.

Based on the above signal model, we can state the probabilistic model which captures the dependencies between the system variables. The pdf of the collection of observed and unknown variables factorizes as

$$\begin{aligned}
&p(\mathbf{y}, \mathbf{h}, \mathbf{x}_{\text{D}}, \mathbf{c}, \mathbf{u}) \\
&= \prod_{i\in\mathcal{D}} f_{\text{D}_i}(h_i, x_i) \prod_{j\in\mathcal{P}} f_{\text{P}_j}(h_j) f_{\text{H}}(\mathbf{h}) \prod_{n\in[1:N]} f_{\text{M}_n}(x_{i_n}, \mathbf{c}_n) \\
&\quad f_{\text{C}}(\mathbf{c}, \mathbf{u}) \prod_{k\in[1:K]} f_{\text{U}_k}(u_k)
\end{aligned} \quad (6)$$

where $f_{\text{D}_i}(h_i, x_i) \triangleq p(y_i|h_i, x_i)$ and $f_{\text{P}_j}(h_j) \triangleq p(y_j|h_j)$ include observed values in $\mathbf{y}$ and are given by

$$f_{\text{D}_i}(h_i, x_i) = \text{CN}\left(h_i x_i; y_i, \gamma^{-1}\right), \quad \forall i \in \mathcal{D}, \quad (7)$$

$$f_{\text{P}_j}(h_j) = \text{CN}\left(h_j x_j; y_j, \gamma^{-1}\right), \quad \forall j \in \mathcal{P}, \quad (8)$$

$f_{\text{H}}(\mathbf{h}) \triangleq p(\mathbf{h})$ is the prior pdf of the vector of channel coefficients for which we set

$$f_{\text{H}}(\mathbf{h}) = \text{CN}\left(\mathbf{h}; \boldsymbol{\mu}^{\text{p}}_{\mathbf{h}}, \boldsymbol{\Sigma}^{\text{p}}_{\mathbf{h}}\right), \quad (9)$$

$f_{\text{M}_n}(x_{i_n}, \mathbf{c}_n) \triangleq p(x_{i_n}|\mathbf{c}_n)$ characterizes the modulation mapping, $f_{\text{C}}(\mathbf{c}, \mathbf{u}) \triangleq p(\mathbf{c}|\mathbf{u})$ accounts for the concatenation of the coding and interleaving operations and $f_{\text{U}_k}(u_k) \triangleq p(u_k)$ is the prior uniform pmf of the kth information bit. To obtain (6),

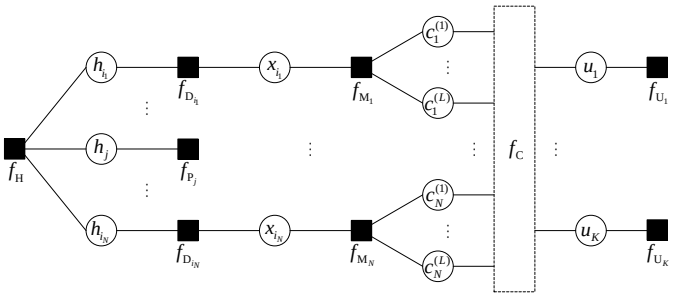


Fig. 1. Factor graph representation of the pdf factorization in (6) with $i_1, \ldots, i_N \in \mathcal{D}$ and $j \in \mathcal{P}$.

we used the fact that $\mathbf{y}$ is independent on $\mathbf{c}$ and $\mathbf{u}$ conditioned on $\mathbf{x}_\mathrm{D}$, $\mathbf{h}$ is independent on $\mathbf{x}_\mathrm{D}$, $\mathbf{c}$ and $\mathbf{u}$, the noise samples z_i are i.i.d., and each data symbol x_{i_n} is independent on all other symbols conditioned on $\mathbf{c}_n$. The factorization in (6) can be visualized in the factor graph [10] depicted in Fig. 1. Note that the code graph is not explicitly given, the code structure being captured by f_C.

IV. Message-Passing Receiver Schemes

In this section, we derive iterative receiver schemes by applying different inference algorithms to the factor graph in Fig. 1. We begin by defining the index sets

$$\begin{aligned}\mathcal{A} &\triangleq \{f_{\mathrm{U}_k} \mid k \in [1:K]\} \cup \{f_\mathrm{C}\} \cup \{f_{\mathrm{M}_n} \mid n \in [1:N]\} \\ &\quad \cup \{f_{\mathrm{P}_j} \mid j \in \mathcal{P}\} \cup \{f_{\mathrm{D}_i} \mid i \in \mathcal{D}\} \cup \{f_\mathrm{H}\}, \\ \mathcal{I} &\triangleq \{h_i \mid i \in [1:M+N]\} \cup \{x_i \mid i \in \mathcal{D}\} \\ &\quad \cup \{c_1^{(1)}, \ldots, c_N^{(L)}\} \cup \{u_1, \ldots, u_K\}.\end{aligned}$$

The receiver has to infer the beliefs of the information bits using the observed vector $\mathbf{y}$ and prior knowledge, i.e., the pilot symbols and their set of indices $\mathcal{P}$, the noise precision γ, the channel statistics in (9), the modulation mapping and the structure of the channel code and interleaver.

We will show that the BP algorithm resulting from setting $\mathcal{A}_\mathrm{MF} = \emptyset$ yields messages of an intractable complexity. Assume that by running BP in the part of the graph containing the modulation and code constraints we obtain the messages

$$m^{\mathrm{BP}}_{f_{\mathrm{M}_n} \to x_{i_n}}(x_{i_n}) \propto \sum_{s \in \mathcal{S}_\mathrm{D}} \beta_{i_n}(s) \delta(x_{i_n} - s) \tag{10}$$

with $i_n \in \mathcal{D}, \forall n \in [1:N]$, where $\beta_{i_n}(s)$ represent extrinsic information on symbol x_{i_n}. These messages are further passed as $n_{x_{i_n} \to f_{\mathrm{D}_{i_n}}}(x_{i_n}) = m^{\mathrm{BP}}_{f_{\mathrm{M}_n} \to x_{i_n}}(x_{i_n})$. Then, for each $i \in \mathcal{D}$ compute the messages

$$\begin{aligned}m^{\mathrm{BP}}_{f_{\mathrm{D}_i} \to h_i}(h_i) &\propto \int f_{\mathrm{D}_i}(h_i, x_i)\, n_{x_i \to f_{\mathrm{D}_i}}(x_i)\, \mathrm{d}x_i \\ &\propto \sum_{s \in \mathcal{S}_\mathrm{D}} \frac{\beta_i(s)}{|s|^2} \mathrm{CN}\left(h_i; \frac{y_i s^*}{|s|^2}, \frac{1}{\gamma |s|^2}\right)\end{aligned} \tag{11}$$

while for all $j \in \mathcal{P}$ set

$$m^{\mathrm{BP}}_{f_{\mathrm{P}_j} \to h_j}(h_j) \propto f_{\mathrm{P}_j}(h_j) \propto \mathrm{CN}\left(h_j; \frac{y_j x_j^*}{|x_j|^2}, \frac{1}{\gamma |x_j|^2}\right). \tag{12}$$

Note that the messages in (11) are proportional to mixtures of Gaussian pdfs with $|\mathcal{S}_\mathrm{D}| = 2^L$ components. Then, after setting $n_{h_i \to f_\mathrm{H}}(h_i) = m^{\mathrm{BP}}_{f_{\mathrm{D}_i} \to h_i}(h_i)$ for all $i \in \mathcal{D}$ and $n_{h_i \to f_\mathrm{H}}(h_i) = m^{\mathrm{BP}}_{f_{\mathrm{P}_i} \to h_i}(h_i)$ for all $i \in \mathcal{P}$, the messages from the channel prior pdf f_H read

$$m^{\mathrm{BP}}_{f_\mathrm{H} \to h_i}(h_i) \propto \int f_\mathrm{H}(\mathbf{h}) \prod_{j \in (D \cup P) \setminus i} n_{h_j \to f_\mathrm{H}}(h_j)\, \mathrm{d}h_j. \tag{13}$$

Using (9), (11) and (12), the messages in (13) become mixtures of Gaussian pdfs with $2^{L(N-1)}$ components for $i \in \mathcal{D}$ and 2^{LN} components for $i \in \mathcal{P}$. Clearly, the complexity of computing these messages is intractable and one has to make additional approximations.

A. Algorithm based on BP combined with Gaussian approximation

Since the intractability of the messages occur due to the mixtures in (11), we approximate those messages as proposed in [11], i.e., for each $i \in \mathcal{D}$ we set

$$m^{\text{BP-GA}}_{f_{\mathrm{D}_i} \to h_i}(h_i) \propto \mathcal{G}\left[m^{\mathrm{BP}}_{f_{\mathrm{D}_i} \to h_i}(h_i)\right] = \mathrm{CN}\left(h_i; \mu_{h_i,\mathrm{o}}, \sigma^2_{h_i,\mathrm{o}}\right) \tag{14}$$

with

$$\begin{aligned}\mu_{h_i,\mathrm{o}} &= \sum_{s \in \mathcal{S}_\mathrm{D}} \alpha_i(s) \frac{y_i s^*}{|s|^2}, \\ \sigma^2_{h_i,\mathrm{o}} &= \sum_{s \in \mathcal{S}_\mathrm{D}} \alpha_i(s) \left(\frac{|y_i|^2}{|s|^2} + \frac{1}{\gamma |s|^2}\right) - |\mu_{h_i,\mathrm{o}}|^2\end{aligned} \tag{15}$$

where we have defined the normalized amplitudes of the Gaussian mixtures $\alpha_i(s) = \beta_i(s)/(\kappa_i |s|^2)$ with $\kappa_i = \sum_{s \in \mathcal{S}_\mathrm{D}} \beta_i(s)/|s|^2$ such that $\sum_{s \in \mathcal{S}_\mathrm{D}} \alpha_i(s) = 1$. We also denote the mean and variances from (12) with $\mu_{h_j,\mathrm{o}}$ and $\sigma^2_{h_j,\mathrm{o}}$, $j \in \mathcal{P}$, and we define the vector $\boldsymbol{\mu}^\mathrm{o}_\mathbf{h} = (\mu_{h_i,\mathrm{o}} \mid i \in [1:M+N])^\mathrm{T}$ and the matrix $\boldsymbol{\Sigma}^\mathrm{o}_\mathbf{h}$ with entries $[\boldsymbol{\Sigma}^\mathrm{o}_\mathbf{h}]_{i,j} = \sigma^2_{h_i,\mathrm{o}}$ if $i = j$ and zero otherwise, for all $i, j \in [1:M+N]$.

Now, using (9) and (14), the message (13) becomes

$$\begin{aligned}m^{\mathrm{BP}}_{f_\mathrm{H} \to h_i}(h_i) &\propto \int \mathrm{CN}\left(\mathbf{h}; \boldsymbol{\mu}^\mathrm{p}_\mathbf{h}, \boldsymbol{\Sigma}^\mathrm{p}_\mathbf{h}\right) \mathrm{CN}\left(\mathbf{h}_{\bar{i}}; \boldsymbol{\mu}^\mathrm{o}_{\mathbf{h}_{\bar{i}}}, [\boldsymbol{\Sigma}^\mathrm{o}_\mathbf{h}]_{\bar{i},\bar{i}}\right) \mathrm{d}\mathbf{h}_{\bar{i}} \\ &\propto \mathrm{CN}\left(h_i; \mu_{h_i,\mathrm{c}}, \sigma^2_{h_i,\mathrm{c}}\right)\end{aligned} \tag{16}$$

with

$$\begin{aligned}\mu_{h_i,\mathrm{c}} &= \mu^p_{h_i} + [\boldsymbol{\Sigma}^\mathrm{p}_\mathbf{h}]_{i,\bar{i}} \left([\boldsymbol{\Sigma}^\mathrm{o}_\mathbf{h}]_{\bar{i},\bar{i}} + [\boldsymbol{\Sigma}^\mathrm{p}_\mathbf{h}]_{\bar{i},\bar{i}}\right)^{-1} (\boldsymbol{\mu}^\mathrm{o}_{\mathbf{h}_{\bar{i}}} - \boldsymbol{\mu}^\mathrm{p}_{\mathbf{h}_{\bar{i}}}), \\ \sigma^2_{h_i,\mathrm{c}} &= [\boldsymbol{\Sigma}^\mathrm{p}_\mathbf{h}]_{i,i} - [\boldsymbol{\Sigma}^\mathrm{p}_\mathbf{h}]_{i,\bar{i}} \left([\boldsymbol{\Sigma}^\mathrm{o}_\mathbf{h}]_{\bar{i},\bar{i}} + [\boldsymbol{\Sigma}^\mathrm{p}_\mathbf{h}]_{\bar{i},\bar{i}}\right)^{-1} [\boldsymbol{\Sigma}^\mathrm{p}_\mathbf{h}]_{\bar{i},i}.\end{aligned} \tag{17}$$

These messages are further passed as extrinsic values, i.e., $n_{h_i \to f_{\mathrm{D}_i \text{ or } \mathrm{P}_i}}(h_i) = m^{\mathrm{BP}}_{f_\mathrm{H} \to h_i}(h_i)$. For $i \in \mathcal{D}$, the following messages are then computed:

$$\begin{aligned}m^{\mathrm{BP}}_{f_{\mathrm{D}_i} \to x_i}(x_i) &\propto \int f_{\mathrm{D}_i}(h_i, x_i)\, n_{h_i \to f_{\mathrm{D}_i}}(h_i)\, \mathrm{d}h_i \\ &\propto \frac{1}{\gamma^{-1} + \sigma^2_{h_i,\mathrm{c}} |x_i|^2} \exp\left(-\frac{|y_i - \mu_{h_i,\mathrm{c}} x_i|}{\gamma^{-1} + \sigma^2_{h_i,\mathrm{c}} |x_i|^2}\right).\end{aligned}$$

After passing extrinsic messages $n_{x_{i_n} \to f_{\mathrm{M}_n}}(x_{i_n}) = m^{\mathrm{BP}}_{f_{\mathrm{D}_{i_n}} \to x_{i_n}}(x_{i_n})$ for all $i_n \in \mathcal{D}$, $n \in [1:N]$, we apply the BP update rule to compute the probabilities of the coded and interleaved bits (which is equivalent to MAP

demapping), followed by BP decoding to obtain the beliefs of the information bits.

B. Algorithm based on expectation propagation

We set $\mathcal{A}_{\text{MF}} = \emptyset$ and $\mathcal{I}_{\text{EP}} = \{h_i \mid i \in \mathcal{D}\}$. Using (4) to compute $m^{\text{EP}}_{f_{\text{D}_i}\to h_i}(h_i)$ leads to messages proportional to Gaussian pdfs; consequently, the EP rule for $m^{\text{EP}}_{f_{\text{H}}\to h_i}(h_i)$ reduces to the BP rule and outputs a Gaussian pdf as in (16), since the operator $\mathcal{G}[\cdot]$ is an identity operator for Gaussian arguments.

Specifically, using (3) and (4), and then (11) and (16), we have for each $i \in \mathcal{D}$

$$b_{h_i}(h_i) = \mathcal{G}\left[n_{h_i\to f_{\text{D}_i}}(h_i) m^{\text{BP}}_{f_{\text{D}_i}\to h_i}(h_i)\right] = \text{CN}\left(h_i; \mu_{h_i}, \sigma^2_{h_i}\right)$$

where

$$\mu_{h_i} = \sum_{s\in\mathcal{S}_{\text{D}}} \phi_i(s) \frac{\sigma^{-2}_{h_i,\text{c}}\mu_{h_i,\text{c}} + \gamma y_i s^*}{\sigma^{-2}_{h_i,\text{c}} + \gamma|s|^2},$$

$$\sigma^2_{h_i} = \sum_{s\in\mathcal{S}_{\text{D}}} \phi_i(s) \frac{\left|\sigma^{-2}_{h_i,\text{c}}\mu_{h_i,\text{c}} + \gamma y_i s^*\right|^2 + \sigma^{-2}_{h_i,\text{c}} + \gamma|s|^2}{\left(\sigma^{-2}_{h_i,\text{c}} + \gamma|s|^2\right)^2} - |\mu_{h_i}|^2$$

with

$$\phi_i(s) \triangleq \frac{\beta_i(s)\,\text{CN}\left(y_i; \mu_{h_i,\text{c}} s, \gamma^{-1} + \sigma^{-2}_{h_i,\text{c}}|s|^2\right)}{\sum_{s\in\mathcal{S}_{\text{D}}} \beta_i(s)\,\text{CN}\left(y_i; \mu_{h_i,\text{c}} s, \gamma^{-1} + \sigma^{-2}_{h_i,\text{c}}|s|^2\right)}$$

and $\mu_{h_i,\text{c}}$, $\sigma^2_{h_i,\text{c}}$ as in (17). Using (4) again, we obtain

$$m^{\text{EP}}_{f_{\text{D}_i}\to h_i}(h_i) \propto \frac{\text{CN}\left(h_i; \mu_{h_i}, \sigma^2_{h_i}\right)}{\text{CN}\left(h_i; \mu_{h_i,\text{c}}, \sigma^2_{h_i,\text{c}}\right)} \propto \text{CN}\left(h_i; \mu_{h_i,\text{o}}, \sigma^2_{h_i,\text{o}}\right)$$

with

$$\begin{aligned} \sigma^{-2}_{h_i,\text{o}} &= \sigma^{-2}_{h_i} - \sigma^{-2}_{h_i,\text{c}}, \\ \mu_{h_i,\text{o}} &= \sigma^2_{h_i,\text{o}}\left(\sigma^{-2}_{h_i}\mu_{h_i} - \sigma^{-2}_{h_i,\text{c}}\mu_{h_i,\text{c}}\right). \end{aligned} \tag{18}$$

Note that, unlike (15) in BP with Gaussian approximation, for $i \in \mathcal{D}$ the values of $\mu_{h_i,\text{o}}$ and $\sigma^2_{h_i,\text{o}}$ computed with (18) depend on all $\mu_{h_j,\text{o}}$ and $\sigma^2_{h_j,\text{o}}$ with $j \in \mathcal{D}$, $j \neq i$ through (17). The parameters of $m^{\text{EP}}_{f_{\text{H}}\to h_i}(h_i)$ are updated using (17) but with $\mu_{h_i,\text{o}}$ and $\sigma^2_{h_i,\text{o}}$ computed as above. Note that all messages that depend on the channel coefficients need to be updated in a sequential manner.

The rest of messages are computed as in Section IV-A.

C. Algorithm based on the combined BP-MF framework

The factor graph is split into the MF and BP parts by setting $\mathcal{A}_{\text{MF}} = \{f_{\text{D}_i} \mid i \in \mathcal{D}\}$ and $\mathcal{A}_{\text{BP}} = \mathcal{A} \setminus \mathcal{A}_{\text{MF}}$. Such a splitting yields tractable and simple messages, takes advantage of the fact that BP works well with hard constraints and best exploits the correlation between the channel coefficients for the graphical representation in Fig. 1[1].

[1]Alternatively, the same level of exploitation of the correlation is obtained by representing the channel variables as a single vector variable $\mathbf{h}$ and "moving" factor node f_{H} to the MF part [9].

Assume now that we have obtained the messages $n_{x_i\to f_{\text{D}_i}}(x_i)$ (their expression will be given later) so that we can compute

$$\begin{aligned} m^{\text{MF}}_{f_{\text{D}_i}\to h_i}(h_i) &\propto \exp\left(\int n_{x_i\to f_{\text{D}_i}}(x_i) \ln f_{\text{D}_i}(h_i, x_i)\,\text{d}x_i\right) \\ &\propto \text{CN}\left(h_i; \mu_{h_i,\text{o}}, \sigma^2_{h_i,\text{o}}\right) \end{aligned}$$

where

$$\mu_{h_i,\text{o}} = \frac{y_i\mu^*_{x_i}}{\sigma^2_{x_i} + |\mu_{x_i}|^2}, \quad \sigma^2_{h_i,\text{o}} = \frac{1}{\gamma\left(\sigma^2_{x_i} + |\mu_{x_i}|^2\right)},$$

with the definition $\mu_{x_i} \triangleq \int n_{x_i\to f_{\text{D}_i}}(x_i)\, x_i\,\text{d}x_i$ and $\sigma^2_{x_i} \triangleq \int n_{x_i\to f_{\text{D}_i}}(x_i)|x_i - \mu_{x_i}|^2\,\text{d}x_i$.

The messages $n_{h_i\to f_{\text{H}}}(h_i) = m^{\text{MF}}_{f_{\text{D}_i}\to h_i}(h_i)$ are sent to the BP part and therefore are extrinsic values. When computing $m^{\text{BP}}_{f_{\text{H}}\to h_i}(h_i)$ we get the same expression as in (16) with the parameters given by (17). Unlike for the previous algorithms, the following messages are beliefs, i.e., APP values:

$$\begin{aligned} n_{h_i\to f_{\text{D}_i}}(h_i) &= z_{h_i}\, m^{\text{BP}}_{f_{\text{H}}\to h_i}(h_i)\, m^{\text{MF}}_{f_{\text{D}_i}\to h_i}(h_i) \\ &= \text{CN}\left(h_i; \mu_{h_i}, \sigma^2_{h_i}\right), \quad \forall i \in \mathcal{D} \end{aligned}$$

with

$$\begin{aligned} \mu_{h_i} &= \left(\sigma^{-2}_{h_i,\text{o}} + \sigma^{-2}_{h_i,\text{c}}\right)^{-1}\left(\sigma^{-2}_{h_i,\text{o}}\mu_{h_i,\text{o}} + \sigma^{-2}_{h_i,\text{c}}\mu_{h_i,\text{c}}\right) \\ \sigma^{-2}_{h_i} &= \sigma^{-2}_{h_i,\text{o}} + \sigma^{-2}_{h_i,\text{c}}. \end{aligned} \tag{19}$$

Then, for all $i \in \mathcal{D}$ we compute

$$\begin{aligned} m^{\text{MF}}_{f_{\text{D}_i}\to x_i}(x_i) &\propto \exp\left(\int n_{h_i\to f_{\text{D}_i}}(h_i) \ln f_{\text{D}_i}(h_i, x_i)\,\text{d}h_i\right) \\ &\propto \text{CN}\left(x_i; \frac{y_i\mu^*_{H_i}}{\sigma^2_{h_i} + |\mu_{h_i}|^2}, \frac{1}{\gamma(\sigma^2_{h_i} + |\mu_{h_i}|^2)}\right) \end{aligned}$$

and for all $n \in [1 : N]$ we pass the messages $n_{x_{i_n}\to f_{\text{M}_n}}(x_{i_n}) = m^{\text{MF}}_{f_{\text{D}_{i_n}}\to x_{i_n}}(x_{i_n})$ to the modulation and coding part of the graph as extrinsic values. After running BP, we obtain (10) and then pass the following APP values back to the MF part, for all $n \in [1 : N]$:

$$n_{x_{i_n}\to f_{\text{D}_{i_n}}}(x_{i_n}) = z_{x_{i_n}}\, m^{\text{BP}}_{f_{\text{M}_n}\to x_{i_n}}(x_{i_n})\, m^{\text{MF}}_{f_{\text{D}_{i_n}}\to x_{i_n}}(x_{i_n}).$$

D. Algorithm based on BP-EM

We now apply EM for channel estimation, so we constrain $b_{h_i}(h_i)$ from the previous scheme to be Dirac delta functions for all $i \in \mathcal{D}$. The resulting messages are the same as in the previous subsection, except for $n_{h_i\to f_{\text{D}_i}}(h_i) = \delta(h_i - \mu_{h_i})$ with μ_{h_i} computed as in (19).

E. Scheduling of message computations

All algorithms employ the same message-passing scheduling: they start by sending messages $m_{f_{\text{P}_j}\to h_j}(h_j)$ corresponding to pilots and by initializing $m_{f_{\text{D}_i}\to h_i}(h_i) \propto \text{CN}\,(h_i; 0, \infty)$; messages (computed according to the corresponding algorithm) are passed on up to the information bit variables – this completes the first iteration; each following iteration consists in passing messages up to the channel prior factor node and back; messages are passed back and forth until a predefined number of iterations is reached. All algorithms end by taking hard decisions on the beliefs of the information bits.

V. Simulation Results

We consider an OFDM system with the parameters given in Table I, and we evaluate by means of Monte-Carlo simulations the bit error rate (BER) performance of the receiver algorithms derived in Section IV. We employ as a reference an algorithm which has perfect channel state information (CSI), i.e., it has prior knowledge of the channel coefficients $\mathbf{h}$.

We encountered numerical problems with the EP-based scheme due to the instability of EP in general, so we used the heuristic approach [7] to damp the updates of the beliefs b_{h_i} with a step-size $\epsilon = 0.5$. Also, the EP-based scheme has higher computational complexity than the others due to its message definition – it requires multiplication of a Gaussian pdf with a mixture of Gaussian pdfs, the approximation $\mathcal{G}[\cdot]$ and division of Gaussian pdfs – and to the sequentiality of the message updates for the channel coefficients[2].

Results in terms of BER versus signal-to-noise ratio (SNR) are given in Fig. 2, while the convergence of the BER with the number of iterations is illustrated in Fig. 3. The receivers based on EP, combined BP-MF and BP-EM exhibit similar performance. They significantly outperform the receiver employing BP with Gaussian approximation. Note that even with a high pilot spacing $\Delta_{\mathrm{P}} \approx 2.5 W_{\mathrm{coh}}$ the performance of the former algorithms is close to that of the receiver having perfect CSI. These three algorithms converge in about 10–12 iterations, while BP with Gaussian approximation converges a little faster, but to a higher BER value. Other results not presented here show that for a higher pilot density the algorithms converge faster, as expected.

TABLE I
Parameters of the OFDM system

Parameter	Value
Subcarrier spacing	15 kHz
Number of active subcarriers	$M + N = 300$
Number of evenly spaced pilot symbols	$M = 10$
Pilot spacing	$\Delta_{\mathrm{P}} \approx 500$ kHz
Modulation scheme for data symbols	16 QAM ($L = 4$)
Modulation scheme for pilot symbols	QPSK
Convolutional channel code	$R = 1/3$, $(133, 171, 165)_8$
Multipath channel model	3GPP ETU
Coherence bandwidth of the channel	$W_{\mathrm{coh}} \approx 200$ kHz

VI. Conclusions

We formulated the problem of joint channel estimation and decoding in a wireless system as inference in a graphical model. To solve the inference problem, we resorted to a recently proposed message-passing framework that unifies the BP and MF algorithms and includes them as particular instances. Additionally, we illustrated how the combined framework can encompass the EP and EM inference algorithms.

Based on the inference techniques considered, we derived four receiver algorithms. Since BP is not suitable for the studied problem, as it leads to intractable messages, we applied its variant which employs Gaussian approximation of the computationally cumbersome messages instead. However, our results showed that it performs significantly worse than the other proposed schemes. Considering the BER results, the computational complexity and stability of these schemes, we conclude that the receiver based on the combined BP-MF framework and its EM variant are the most effective receiver algorithms.

[2]For the other receiver schemes, it can be shown that the parameters of all messages $m^{\mathrm{BP}}_{f_{\mathrm{H}} \to h_i}(h_i)$ with $i \in \mathcal{D} \cup \mathcal{P}$ can be computed jointly and with a lower complexity.

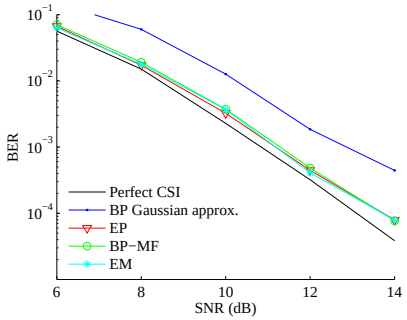


Fig. 2. BER vs. SNR performance of the receiver algorithms for a number of pilot symbols $M = 10$, corresponding to a high pilot spacing $\Delta_{\mathrm{P}} \approx 2.5 W_{\mathrm{coh}}$.

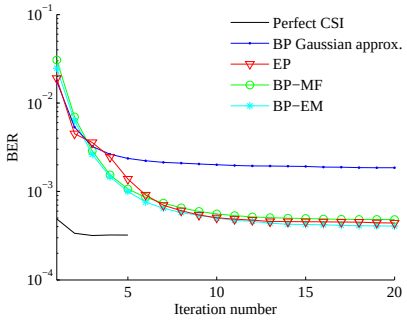


Fig. 3. Convergence of the BER performance from Fig. 2 at SNR $= 12$ dB.

References

[1] M. J. Wainwright and M. I. Jordan, "Graphical models, exponential families, and variational inference," *Foundations and Trends in Machine Learning*, vol. 1, pp. 1–305, 2008.

[2] F. Kschischang, B. Frey, and H.-A. Loeliger, "Factor graphs and the sum-product algorithms," *IEEE Trans. Inform. Theory*, vol. 47, no. 2, pp. 498–519, Feb. 2001.

[3] H.-A. Loeliger, J. Dauwels, J. Hu, S. Korl, L. Ping, and F. Kschischang, "The factor graph approach to model-based signal processing," *Proc. IEEE*, vol. 95, no. 6, pp. 1295–1322, Jun. 2007.

[4] J. Winn and C. Bishop, "Variational message passing," *Journal of Machine Learning Research*, 2004.

[5] A. Dempster, N. Laird, and D. Rubin, "Maximum likelihood from incomplete data via the EM algorithm," *Journal of the Royal Statistical Society. Series B (Methodological)*, vol. 39, no. 1, pp. 1–38, 1977.

[6] T. Minka, "Expectation propagation for approximate bayesian inference," in *Proc. 17th Conf. on Uncertainty in AI*, 2001, pp. 362–369.

[7] ——, "Divergence measures and message passing," Microsoft Research, Tech. Rep., 2005.

[8] J. Yedidia, W. Freeman, and Y. Weiss, "Constructing free-energy approximations and generalized belief propagation algorithms," *IEEE Trans. Inform. Theory*, vol. 51, no. 7, pp. 2282–2312, July 2005.

[9] E. Riegler, G. E. Kirkelund, C. N. Manchón, M.-A. Badiu, and B. H. Fleury, "Merging belief propagation and the mean field approximation: A free energy approach," *submitted to IEEE Trans. Inform. Theory, 2012, arXiv:1112.0467v2[cs.IT]*.

[10] F. R. Kschischang, B. J. Frey, and H. A. Loeliger, "Factor graphs and the sum-product algorithm," *IEEE Trans. Inform. Theory*, vol. 47, no. 2, pp. 498–519, 2001.

[11] Z. Shi, T. Wo, P. Hoeher, and G. Auer, "Graph-based soft iterative receiver for higher-order modulation," in *Proc. 12th IEEE Int. Conf. on Comm. Tech. (ICCT)*, Nanjing, China, Nov. 2010, pp. 825–828.